

.. 10241-66  
ACC NR: AP5028275

GaAs should occur at a temperature of the electron gas equal to the Debye temperature ( $\theta_D = 410K$ ) and not the lattice temperature. Therefore, in the range of lattice temperatures between 77—300K the threshold current should depend weakly on the temperature. The weak temperature dependence of the threshold current for laser action in GaAs was confirmed experimentally. Orig. art. has: 2 figures. [CS]

SUB CODE: 30 / SUBM DATE: 14Jan65 / ORIG REF: 003 / OTH REF: 004 / ATD PRESS:  
*4161*

Card 2/2

LYUSHIN, Sergey Fedorovich; RASSKAZOV, Valeriy Antonovich; SHARIN,  
Leonid Kirillovich; GLEZER, D.Kh., otv. red.; GURVICH, M.A.,  
red.izd-va; GAYFULLIN, F.G., tekhn. red.

[Use of the UfNII-3 spring wall scraper] Primenenie avtomati-  
cheskogo letaiushchego skrebka UfNII-3. Ufa, Bashkirskoe  
knizhnoe izd-vo, 1958. 47 p. (MIRA 15:1)  
(Paraffins) (Oil wells—Equipment and supplies)

21.1.1.1.

3. A. 51. V. . "A case of phlegmon of the stomach.", Sbornik stat., Kravkov similar, roven. geografichka, III, Matcarenko, 1941, p. 133-36.

See: U-1313, 1; August 53, (Letopis 'nauki Sovetsk', No. 24, 1945).

ZINGERMAN, M.I.; SHARIN, V.N. (Khabarovsk)

Multicameral echinococcosis of the brain. Vop. neirokhir. 18 no.<sup>4</sup>:  
59-60 J1-Ag '54.

(MLRA 7:10)

(BRAIN, diseases,  
\*echinococcosis)  
(ECHINOCOCCOSIS,  
\*brain)

ZINGERMAN, M.I.; SHARIN, V.N. (Khabarovsk)

Clinical aspects and therapy of arachnitis of the posterior cranial fossa. Vop.neirokhir. 22 no.6:41 N-D '58. (MIRA 12:2)  
(ARACHNOID, dis.  
arachnitis of posterior cranial fossa (Rus))

Mikhail M.M. Mikhalev, yekaterinsk meditsinskoy sluzhby; SHARIN, V.N., polkovnik meditsinskoy sluzhby, zasluzhennyy vrach RSFSR; MOSHCHENKO, V.A., podpolkovnik meditsinskoy sluzhby

Experience in organizing gratuitous blood donorship. Voen.-med. zhur. no.9455-67 '64. (MIRA 18:5)

"APPROVED FOR RELEASE: 08/23/2000

CIA-RDP86-00513R001548610020-4

VASIL'YEV, M.V., doktor tekhn. nauk; SHARIN, V.V., inzh.

Single-bucket loaders used in openworks. Mekh. i avtom. proizv.  
19 no.4:22-24 Ap '65. (MIRA 18:6)

APPROVED FOR RELEASE: 08/23/2000

CIA-RDP86-00513R001548610020-4"

SHARIN, Yo.I., teknik

Method for finding the break in the strand of a flexible cable  
without a metal sheath. Energetik 3 no.7:28-29 J1 '55.  
(Electric cables--Testing) (MLRA 8:9)

USSR/Miscellaneous - Theses

Card 1/1 Pub. 128 - 24/26

Authors : .....

Title : Abstract of theses

Periodical : Vest. mash. 2, 108-109, Feb 1954

Abstract : The following abstracts of theses are presented: Anson, P. I. - Experimental investigation of the strength of cylinder flange joints for high-pressure turbines; Sharin, Yu. S. - The investigation of certain economical processes in cutting metals at various speeds and feeds; Kotikova, E. T. - The effect of cleaning with a blast of metal-shot on the strength of machine components; Lumpe, V. E. - The working of holes with an electric spark method; and Nefedov, A. F. - The investigation of the influence of microfinished surfaces on the wear of cylinders of internal combustion engines.

Institution : .....

Submitted : .....

Sharin, Yu. S.

USSR/Engineering - Metal cutting

Card 1/1 : Pub. 103 - 2/23

Authors : Sharin, YU. S.

Title : The cutting of metal at increased feeds

Periodical : Stan. i instr. 8, 7-11, Aug 1954

Abstract : The condition of metal cutting at increased feeds, in accordance with methods devised by, turner V. A. Kolesov, was investigated. The tests were conducted on a turning lathe, type LA62, with steels - Mark 30, 18KhNVA, and OKhNIM. Three references, (1953). Graphs; tables, diagrams.

Institution : ..

Submitted : ....

NORETS, N.V.; SHARIN, Yu.S., kandidat tekhnicheskikh nauk, redaktor;  
DUGINA, N.A., tekhnicheskiy redaktor

[For advanced technology in every production unit] Za peredovuiu  
tekhnologiiu na kazhdom proizvodstvennom uchastke. Moskva, Gos.  
nauchno-tekhn. izd-vo mashinostroitel'noi lit-ry, 1954. 29 p.  
(Chelyabinsk--Tractor industry) (MLRA 8:7)

SHABASHOV, S.P., kandidat tekhnicheskikh nauk, redaktor; SHARIN, Yu.S.,  
kandidat tekhnicheskikh nauk, redaktor; DUGINA, N.A., tekhnicheskiy  
redaktor.

[Manufacture and utilization of tools; work practice of Ural plants]  
Proizvodstvo i eksploatatsiya instrumenta; opyt ural'skikh zavodov.  
Moskva, Gos. nauchno-tekhn. izd-vo mashinostroit. lit-ry. No.7 [High-  
production tools and equipment] Vysokoproizvoditel'nye instrumenty i  
osnastka. 1955. 210 p.  
(Tools)

123-1-665

Translation from: Referativnyy Zhurnal, Mashinostroyeniye, 1957,  
Nr 1, p. 101 (USSR)

AUTHORS: Serebrovskiy, V. B., Sharin, Yu. S.

TITLE: Cutter Dynamometer for Measuring Cutting Forces  
(Rezets-dinamometr dlya izmereniya usiliy rezaniya)

PERIODICAL: Tekhnologiya mashinostroyeniya. Mekhanich.obrabotka  
detalej na metallorezhushchikh stankakh. Sbornik. Moskva-  
Sverdlovsk, Mashgiz, 1955, pp. 40-45

ABSTRACT: Cutter dynamometer with indicator which is used at the  
Uralmashzavod cutting laboratories is described.  
The dynamometer was calibrated using a special hydraulic  
dynamometer and the accuracy of the device was determined.  
Charts, photos, graphs, diagrams and bibliography are  
attached.

V.S.I.

Card 1/1

SHARIN,Yu.S.; SEREBROVSKIY,V.B.

Vibration reducing chamfer on the front-rake edge. Stan. i  
instr. 26 no.7:21-22 J1 '55. (MIRA 8:9)  
(Metal-cutting tools)

"APPROVED FOR RELEASE: 08/23/2000

CIA-RDP86-00513R001548610020-4

SHARIN, Yu.S., kandidat tekhnicheskikh nauk.

Shearing forces in cutting. Trudy Ural.politekh.inst. no.42:  
57-63 '55. (MIRA 9:8)  
(Grinding and polishing)

APPROVED FOR RELEASE: 08/23/2000

CIA-RDP86-00513R001548610020-4"

SHARIN, Yu.S.

Shrinking of shavings in case of wide-range variations in feeding  
and cutting depths. Trudy Ural.politekh.inst. no.50:69-94 '56.  
(Metal cutting) (MLRA 9:11)

SHARIN, Yu.S.

Relation of longitudinal shrinking of shavings to shrinking in  
width and depth during metal cutting. Trudy Ural.politekh.inst.  
no.50:95-117 '56. (MLRA 9:11)  
(Metal cutting)

KUVSHINSKIY, V.V., kandidat tekhnicheskikh nauk; SEREBRENNIK, Yu.B.,  
kandidat tekhnicheskikh nauk; SOLONIN, I.S., kandidat  
tekhnicheskikh nauk; SHARIN, Yu.S., kandidat tekhnicheskikh  
nauk.

Surface formation and force relationships in large-feed  
semifinish grinding. Trudy Ural.politekh.inst. no.63:21-36  
'56. (MLRA 10:2)

(Surfaces (Technology)) (Grinding and polishing)

SHARIN, Yu.S., kandidat tekhnicheskikh nauk.

System of basic definitions and the geometry of cutting tools.  
Trudy Ural.politekh.inst. no.63:56-62 '56. (MLRA 10:2)

(Cutting tools)

"APPROVED FOR RELEASE: 08/23/2000

CIA-RDP86-00513R001548610020-4

SAVEL'YEVA, I.M., inzhener; SHARIN, Yu.S., kandidat tekhnicheskikh nauk.

Constant volume conditions in metal cutting. Trudy Ural.politekh.  
Inst. no.63:90-95 '56. (MLRA 10:2)

(Metal cutting)

APPROVED FOR RELEASE: 08/23/2000

CIA-RDP86-00513R001548610020-4"

BOYARSKIY, Lazar' Tadrisovich; KORSHIKOV, Nikolay Petrovich; LIBERMAN, B.S., inzh., retsenzent; YEGOROV, I.S., inzh., retsenzent; SHUNAYEV, B.K., kand.tekhn.nauk, retsenzent; LOSKUTOV, V.V., kand.tekhn.nauk, retsenzent; SHARIN, Yu.S., kand.tekhn.nauk, red.; DUGINA, N.A., tekhn.red.; EL'KIND, V.D., tekhn.red.

[Technology of the manufacture of machine tools] Tekhnologija stankostroeniia. Moskva, Gos.nauchno-tekhn.izd-vo mashinostroit. lit-ry, 1959. 371 p. (MIRA 13:2)  
(Machine-tool industry)

REF ID: ADO942  
50V 2 BOOK EXPONATS

Mechanico-technical characteristics of machine tools and their technological processes.  
General technology  
Mathematical 1. A series of state-of-the-art machine tool production. Characteristics, Construction, Operation and Automation in the Building-Building Industry, Moscow, 1959, 519 p., 12,000 copies printed.

Ed.: Ye. V. Pal'ev, Doctor of Technical Sciences, Prof. M. A. Kostylev,  
Editorial Board: P. V. Tikhonov, Professor, V. V. Ermakov, Candidate of  
Technical Sciences, N. V. Pol'yanov, Doctor of Technical Sciences, V. S. Sosulin,  
P. V. Smirnov, Candidate of Technical Sciences, V. I. Sopol'skiy, Candidate of Technical Sciences, V. T. Chubarev, Professor, V. V. Goryainov,  
P. L. Smirnov, Candidate of Technical Sciences, and P. V. Chubarev, Professor  
sor.

Purpose: This book is intended for production engineers and personnel engaged

in industrial planning.

Content: The material presented in this book is said to be based on practices developed and tested in the machine-building plants of the Central and Siberian regions and various branches of mechanization and automation of Siberia. Listed are various methods of mechanization and automation and their applications in foundries, forging shops and assembly plants, and other fields of the metalworking industry, textile, construction, building materials, and quality control on an industrial scale. Various mechanisms, tools, tools, devices, tools, and instruments currently used in mechanization and automation of these industrial processes as described earlier are mentioned. The equipment mentioned is said to have been produced by the plants using their own resources. There are chapters on various types of mechanization and automation and discussed. There are

2. Mechanization of Production Operations (Equipment, Tools, Devices, Tools, and V. M. Rzhevskiy, Professor)

and V. M. Rzhevskiy, Professor) 521  
Mechanization of scrapings  
Parts and devices for the mechanization of pollution  
Equipment for the mechanization of leaching  
Parts and devices for mechanization in heavy machinery building  
Mechanization of finishing operations in heavy machinery building

3. Mechanistic and Automatic Production Lines (Soviet, Th. S.,

Candidate of Technical Sciences, V. F. Nikulin, Candidate of Technical Sciences, V. F. Nikulin)

579  
A. Z. Dvirich, Bachelor  
Characteristics of certain automatic lines  
Automatic line for machining of rope stakes  
Automatic line for machining of track-profile stakes

Card 11/15

KOROBENIKOV, Vitaliy Grigor'yevich; SAK-SHAK, Boris Aleksandrovich;  
TETELYUTIN, Yuriy Leonidovich; SHARIN, Yu.S., red.;  
DUGINA, N.A., tekhn.red.

[Automation of universal machine tools] Avtomatizatsiya uni-  
versal'nykh metallorezhushchikh stankov. Moskva, Gos.nauchno-tekhn.  
izd-vo mashinostroit.lit-ry, 1960. 157 p.

(MIRA 14:3)

(Machine tools)

(Automation)

SHAININ, Yuryi Sergeyevich; KHODAKOVSKIY, N.S., inzh., retsenzent;  
DUGINA, N.A., tekhn. red.

[Automatic machine-tool lines in the machinery industry]  
Avtomatische stanochnye linii v mashinostroenii. Mo-  
skva, Mashgiz, 1961. 36 p. (Nauchno-populiarnaia bibli-  
teka rabochego-stanochnika, no.31) (MIRA 15:3)  
(Machine tools) (Automation)

SHARIN, Yuriy Sergeyevich; DUGINA, N.A., tekhn. red.

[Automatic machine-tool lines in the machinery industry]  
Avtomatycheskie stanochnye linii v mashinostroenii. Moskva,  
Mashgiz, 1961. 138 p. (MIRA 15:6)  
(Machine tools) (Automation)

SHARIN, Yu.S., dotsent, kand. tekhn. nauk

Direction of chip movement and the real geometry of cutting tools.  
Trudy Ural. politekh. inst. no.112:102-109 '61. (MIRA 16:7)

(Metal cutting)

SHARIN, Yu.S., kand. tekhn. nauk, dotsent

Calculating the radial and longitudinal wear in turning.  
Izv. vys. ucheb. zav.; mashinostr, no.10:191-193 '63.  
(MIRA 17:3)

1. Ural'skiy politekhnicheskiy institut.

SHARIN, Yu.S., kand.tekhn.nauk; GOLUBEV, S.S.

Modernization of a thread-rolling machine. Mashinostroitel'  
no.11:13-14 N '63. (MIRA 16:11)

SHARIN, Yu.S.

Dynamometer with a contact vibration pickup for measuring  
cutting forces. Trudy Ural. politekh. inst. no.1293102-105  
'63 (NPA 17#8)

L 3238-66 EWT(m)/EWP(e)/EWP(t)/EWP(k)/EWP(z)/EWP(b)/EWA(c) ID/RW  
 ACCESSION NR: AP5022039 UR/0286/65/000/014/0110/0110  
 621.775.741

AUTHOR: Boginskiy, L. S.; Kabel'skiy, I. M.; Korotkov, V. A.; Loginov, P. I.; Roman, O. V.; Sharin, Yu. Ye.

TITLE: Pressure source for compaction of powder thin-wall bushings or shapes.  
 Class 49, No. 173105

SOURCE: Byulleten' izobreteniy i tovarnykh znakov, no. 14, 1965, 110

TOPIC TAGS: powder metallurgy, powder compaction, explosive compaction

ABSTRACT: This Author Certificate introduces a method for the explosive compaction of thin-wall, metal-powder bushings or shapes. In this method, exploding wire is used for generating pressure. The wire is placed in a pressure-transferring medium, e.g., polyethylene or wax, which fills the inner cavity of the blank being formed. [MS]

ASSOCIATION: none

SUBMITTED: 02Jan63

NO REF. Sov: 000

Cord 1/1

ENCL: 00

OTHER: 000

SUB CODE: IE, EC

ATD PRESS: 4104

SHARINA, E.G.

Experimental data on the toxicity of oily solutions of some chemical poisons used in agriculture for warm-blooded animals. J. Hyg. Epidemiol., Praha 1 no. 4:479-486 1957.

1. University Department of Nutritional Hygiene of the First (Sechenov) Moscow Medical Institute, Moscow.  
(INSECTICIDES, toxicity,  
oily solutions)

S/169/62/000/005/019/093  
D228/D307


AUTHOR: Urupov, A. K. and Sharina, K. V..

TITLE: The frequency characteristics of leveling the results  
of observations

PERIODICAL: Referativnyy zhurnal, Geofizika, no. 5, 1962, 26, ab-  
stract 5A207 (Uch. zap. Permsk. un-t, 18, no. 4,  
1961, 77-82)

TEXT: The frequency characteristics of groups of receivers (sour-  
ces) with a homogeneous, a triangular, and a parabolic sensitivity  
distribution (parabolic equalizing) are analyzed and compared.  
[  
/- Abstracter's note: Complete translation.]

Card 1/1

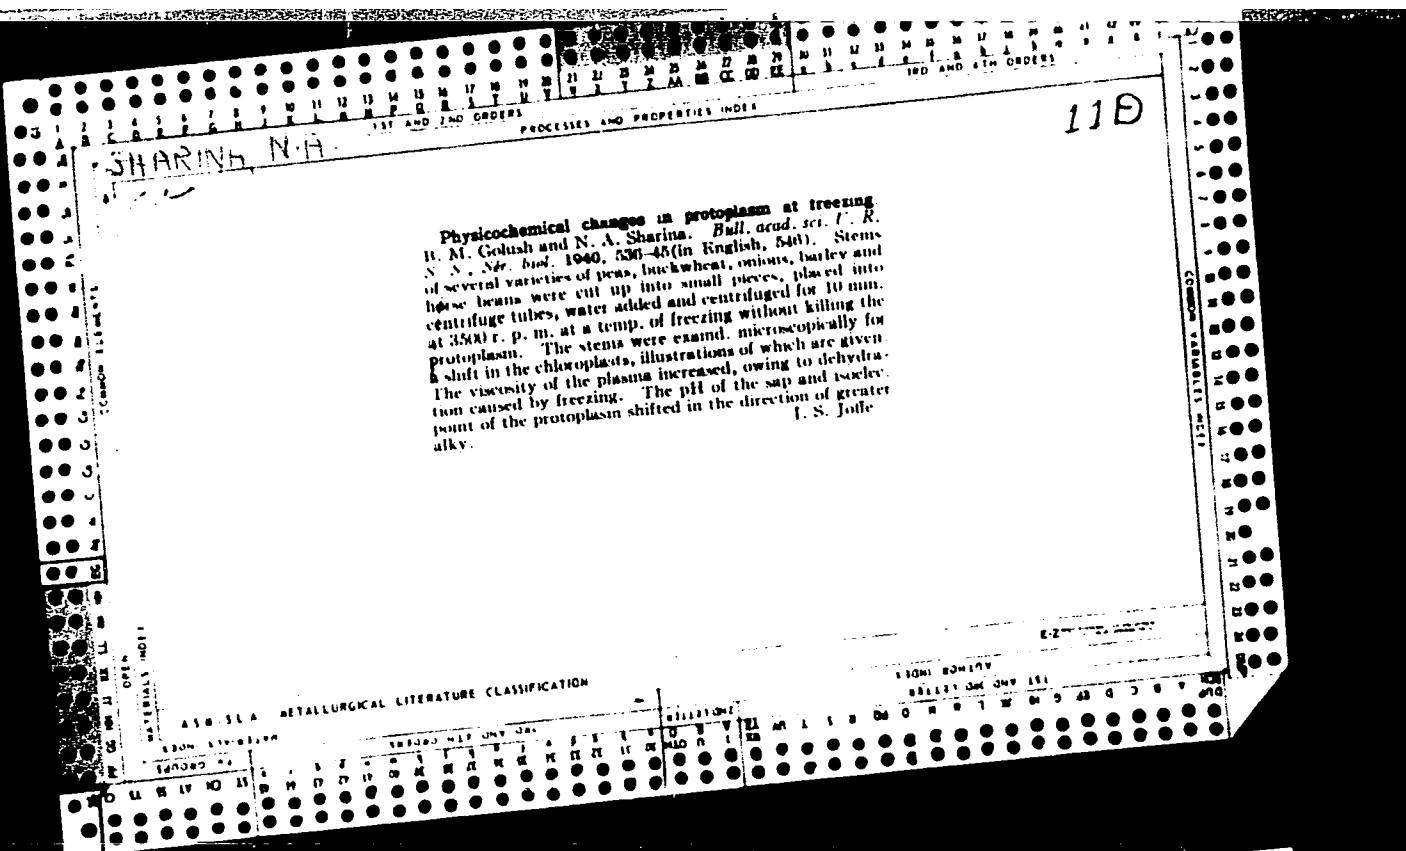

Sharina, N.A.

J-3

USSR/Soil Science - Physical and Chemical Properties of Soils.

Abs Jour : Ref Zhur - Biol., No 3, 1958, 10492

Author : Gorbunov, N.I., Labenets, Ye.M., Sharina, N.A.

Inst Title : The Mineralogical and Chemical Composition of the Muddy Fraction of the Takyry and of the Kizyl-Arvat Mountain Plain (An Extension of the Takyry)

Orig Pub : Takyry Zap. Turkmenii i puti ikh s.-kh. osvoyeniya, Moskva, Akad Nauk SSSR, 1956, 388-410

Abstract : Mud forms 16% of the upper part of the takyr crust and 32% of the lower part. Hydrophobic minerals (hydromicas) predominate in this fraction in the upper part of the crust, and hydrophilic minerals (beydellite and others) in the lower part. Data are given on radioscopic analysis, thermal analysis, and total analysis of the fine-grained fractions. The metabolic capacity is insignificant, as is the swelling and also the maximum hygroscopic moistness of the

Card 1/2

USSR/Soil Science - Physical and Chemical Properties of Soils. J-3

Abs Jour : Ref Zhur - Biol., No 3, 1958, 10492

muddy fraction of the upper part of the crust. Data on the total composition of the muddy fraction have indicated a broader  $\text{SiO}_2/\text{Al}_2\text{O}_3$  ratio in the upper part of the takyr crust. The slight metabolic capacity of the muddy fraction of the takyr and its alluvial deposits /prolyuvial' nyye nanosy/ is caused by desert wind erosion and the soil's low content of organic substances.

Card 2/2

SHAKIN, S.A.

APPROVED FOR RELEASE: 08/23/2000 CIA-RDP86-00513R001548610020-4

Use of phytoncides in suppurative diseases in ambulant patients.  
Sov.med.18 no.3:26-28 Mr '54. (MLRA 7:2)

1. Iz kliniki obshchey khirurgii Yaroslavskogo meditsinskogo  
instituta. (Phytoncides) (Suppuration)

YETS, A.O., dotsent; SANDLER, A.O., ordinator; SHARINA, S.A., ordinator

Phytoncide-novocaine block in acute suppurative and inflammatory  
diseases in ambulatory practice. Sov.med.21 no.3:112-114 Mr '57.  
(MIRA 10:7)

1. Iz kafedry obshchey khirurgii Yaroslavskogo meditsinskogo  
instituta (zav. kafedroy - prof. S.G.Rukosuyev)  
(FURUNCULOSIS, ther.  
phytoncide-procaine blockade)

(PLANTS

phytoncide-procaine blockade in furunculosis)

(SWEAT GLANDS, dis.  
hidradenitis, ther., phytoncide-procaine blockade)

(PROCAINE, ther. use  
phytoncide-procaine blockade in furunculosis & hidradenitis)

BARCHENKO, Ivan Petrovich, prof.; CHISTYAKOVA, Aleksandra Matveyevna,  
dots.; VANKHANEN, Vil'yam Davidovich, kand. med. nauk;  
KRYZHANOVSKAYA, Yelena Stanislavovna, dots.; Prinimali ucha-  
stye: PETROVSKIY, K.S., prof.; ALEKSANDROVA, N., nauchn.  
sotr., prepodavatel'; BEDULEVICH, T., nauchn. sotr., prepo-  
davatel'; TURUK-PCHELINA, Z., nauchn. sotr., prepodavatel';  
SHARINA, Ye., nauchn. sotr., prepodavatel'; BURSHTEYN, A.I.,  
prof.; SHEVCHENKO, M.G.; STOLMAKOVA, A.I.

[Manual on the vocational training of students in nutritional  
hygiene] Rukovodstvo k proizvodstvennomu obucheniiu studentov  
po gigiene pitaniiia. 2. izd., ispr. i dop. Kiev, Zdorov'ia,  
1965. 221 p.

(MIRA 18:7)

1. Zaveduyushchiy kafedroy gigiyeny pitaniya I Moskovskogo meditsinskogo instituta im. I.M. Sechenova (for Petrovskiy).
2. Kafedra gigiyeny pitaniya I Moskovskogo meditsinskogo instituta im. I.M. Sechenova (for Aleksandrova, Bedulevich, Turuk-Pchelina, Sharina). 3. Zaveduyushchiy kafedroy gi-  
giyeny pitaniya Odesskogo meditsinskogo instituta (for Burshteyn). 4. Glavnyy inspektor po gigiyene pitaniya Mi-  
nisterystva zdravookhraneniya SSSR (for Shevchenko).

KHRUSTALEV, A.A., predsedatel' sektsii pitaniya; SHARINA, Ye.G., sekretar'  
sektsii.

Work of the nutrition section of the Moscow branch of the All-Union  
Hygiene Society in 1955. Vop. pit. 15 no.4:63 Jl-Ag '56. (MLRA 9:9)  
(NUTRITION)

~~Khrestalev, A.A., professor; Smirina, Ye.G.~~

Work of the nutrition section of the Moscow Branch of the All-Union Hygiene Society during 1956. Vop. cit. 16 n. 1:90-91 J1-Ag '57.  
(MLR 10:10)

1. Predsedatel' sektsii pitaniya Moskovskogo otdeleniya  
Vsesoyuznogo gigiyenicheskogo obshchestva (for Khrestalev) . 2.  
Sekretar' sektsii pitaniya Moskovskogo otdeleniya Vsesoyuznogo  
gigiyenicheskogo obshchestva (for Sharina)  
(NUTRITION)

S. W. C., U.S.A., had told Solon (Mr.) "I consider the existence of  
the [Soviet] 2nd Front as the most important  
and valuable [intelligence] information I have ever had."  
[Intelligence] Bureau, "Soviet Union: Soviet Fronts and Fronts,"  
1943, 152. 152 (First War Order of the 2nd Front in V.I. Sosulin,  
etc., 20 Aug. 1943). List of Soviet Fronts, pp. 12-1. (U.22-52, 116)

SHARINA, Ye.G. (Moskva)

Hygienic evaluation of potatoes cultivated in soil treated with heptachlor [with summary in English]. Vopr.pit. 17 no.1:58-64  
(MIRA 11:4)  
Ja-F '58.

1. Iz kafedry gigiyeny pitaniya (zav. - prof. A.A.Khrustalev)  
I Moskovskogo ordena Lenina meditsinskogo instituta imeni  
I.M.Sechenova.

(INSECTICIDES, effects,  
heptachlor, on potatoes, hyg. aspects (Rus))

(POTATOES,  
eff. of heptachlor, hyg. aspects (Rus))

SHARINA, Ye.G.

Influence of concentrations of oily solutions of chemical posions  
on the degree of toxic action as shown experimentally. Trudy  
1-go MMI 5:178-182 '59. (MIRA 13:8)

1. Iz kafedry gigiyeny pitaniya (zav. - prof. A.A. Khrustalev)  
1-go Moskovskogo ordena Lenina meditsinskogo instituta im.  
I.M. Sechenova. (POISONS---PHYSIOLOGICAL EFFECT)

SMITH, W. T.

"hygienic characteristics of DT and of vegetables grown on soil treated with this preparation."

Report presented at the 2nd All-Union Scientific Conference on the Hygiene and Toxicology of Pesticides, Ministry of Health USSR Committee on the Study and Regulation of New Poisonous Chemicals of the Main State Sanitary Inspection USSR and Kiev Institute of Labor Hygiene and occupational Diseases, Kiev 11-19 Oct 1962.  
(Sanitariya i Sanitariya, No. 3, 1963 p. 105-106.)

Kiev Institute of Labor Hygiene and Occupational Diseases.

SHEVCHENKO, Nadezhda Georgiyevna; SHARINA, Yelizaveta Georgiyevna;  
FRONSFIEV, V.I., Red.

[Problems of nutritional hygiene during the use of  
pesticides in agriculture] Voprosy gigieny pri uchaniia  
pri ispol'zovanii pesticidov v sel'skom khoziaistve.  
Moskva, Meditsina, 1975. 122 p. (MIRA 18:7)

L 51452-65 EWT(d)/EWT(m)/EWP(w)/EWA(d)/EWP(v)/EPR/EWP(k)/EWA(h) Pf-4/

Peb WW/EM

ACCESSION NR: AP5011321

UR/0258/65/005/002/0284/0292

624.074

23

B

AUTHOR: Sharinov, I. L.(Moscow)

TITLE: The stressed state of a cylindrical cantilevered shell acted on by a focused normal stress applied to its free edge

SOURCE: Inzhenernyy zhurnal, v. 5, no. 2, 1965, 284-292

TOPIC TAGS: cantilevered cylindrical shell, closed shell, stressed state analysis, shell height, bending moment, buckling moment

ABSTRACT: A solution for a closed cylindrical cantilevered shell is obtained on the basis of a shallow shell equation, integrating by the trigonometric series procedure. Concentrated stress was replaced by a distributed load proximate to it; hence, all the sought functions were expressed in terms of converging series. The author concludes that the stressed state of the subject shell is characterized primarily by the internal buckling moment  $G_1$  and the internal tangential bending moment  $G_2$  ( $G_2 > G_1$ ). Relationships of  $G_1$  and  $G_2$  to the length of the shell and the ratio of its radius to height did not differ from the case of a freely supported shell, acted on at its middle by a focused normal force.

Card 1/2

L 51452-65

ACCESSION NR: AP5011321

Moments  $G_1$  and  $G_2$  in the cantilevered shell were, respectively, lower and higher than in the freely supported shell. The magnitude of bending stresses depends primarily on shell height. Orig. art. has: 4 tables, 6 figures and 39 formulas.

ASSOCIATION: None

SUBMITTED: 01Jul64

ENCL: 00 SUB CODE: ME, AS

NO REF SOV: 006

OTHER: 000

*me*  
Card 2/2

"APPROVED FOR RELEASE: 08/23/2000

CIA-RDP86-00513R001548610020-4

SHAINOV, I...; 1965.

Some problems in automating the installation of crane-loaders. Mat.  
po met.zonstr. no. 8:172-179 '62. (MIRA 28:5)

APPROVED FOR RELEASE: 08/23/2000

CIA-RDP86-00513R001548610020-4"

SHARIKOV, I.L. (Moskva)

Calculating a closed cylindrical bracket shell for concentrated  
boundary loadings. Inzh. zhur. 5 no.6:1074-1080 '65.  
(MIRA 19:1)

1. Submitted February 24, 1965.

ACC NR: AP6002622

REF ID: A6513R001548610020-4  
IJP(c) 84/7/28

AUTHOR: Sharinov, I. L. (Moscow)

SOURCE CODE: UR/0258/65/005/006/1074/1080

ORG: none

TITLE: On the problem of calculating a closed cylindrical cantilever shell with concentrated loads on its edges

SOURCE: Inzhenernyy zhurnal, v. 5, no. 6, 1965, 1074-1080

TOPIC TAGS: stress distribution, cylindric shell, bending stress, numeric method

ABSTRACT: The stress distribution is calculated in a cantilever shell with a concentrated load and bending moment at the free end. First, the bending stresses in the shell are calculated with a bending moment only and next, identical calculations are made with a force along the cylinder generatrix. The solution is carried out numerically and the results are given in figures as well as in tabular form in functions of the ratio  $R/h$ . In the first case, two principal moments  $G_1$  and  $G_2$  are identified where  $G_1 > G_2$ . It is shown that  $G_1$  depends on the shell area only, whereas  $G_2$  depends on  $R/h$  for a given area. Similarly, for

Card 1/2

UDC: 624.074

Card 2/2 MCP  
APPROVED FOR RELEASE: 08/23/2000

ZEYGERMEYSTER, L.; SHARINOV, L.

Design and construction of industrial buildings with composite roofs. Prom.stroi.i inzh.soor. 4 no.2:8-12 Mr-Ap '62.  
(MIRA 15:11)

1. Glavnnyy inzhener tresta "Dneprokhimstroy" (for Zeygermeyster).
2. Glavnnyy inzhener stroitel'nogo otdela Dneprodzerzhinskogo filiala Gosudarstvennogo proyektnogo i nauchno-issledovatel'skogo instituta azotnoy promyshlennosti (for Sharinov).  
(Industrial buildings) (Roofing, Concrete)

SHARINOV, L.P.; SHUSTEROV, S.I.; ARRAAMYAN, A.N.

Zoning the area of a nitrogen fertilizer plant. Prom. strel. 42  
no.4:23-25 '65. (MIRA 18:4)

SHARINOVA, S.A.; OSPOVAT, B.L.

Psychotic conditions as a symptom of acute pancreatitis. Sov.med.  
25 no.2:133-136 F '61. (MIRA 14:3)

1. Iz psikho-somaticeskogo otdeleniya (zav. G.Ya.Tartakovskiy)  
bol'nitsy imeni S.P.Botkina (glavnnyy vrach - prof. A.N.Shabanov).  
(PANCREAS—DISEASES) (PSYCHOSES)

SHARINOVA-GEKKER, R.B.

Omelianskii's modified medium in bacteriological diagnosis of  
dysentery. Lab.delo 2 no.2:27-28 Mr-ap '56. (MLRA 9:10)

1. Iz sanitarno-bakteriologicheskoy laboratorii sanitarno-epidemiologicheskoy stantsii (glavnnyy vrach M.D.Ghertkov) Amur-Nizhnedneprovskogo rayona Dnepropetrovска.  
(DIAGNOSIS) (DYSENTERY)

SHARINOVA, S.M.

Calculation and utilization of examples of precise solutions  
of nonlinear prognostic equations. Trudy MMTS no.4:100-108 '64  
(MIRA 18:2)

SHARINSKIY, T., arkhitektor

Features of the layout and building development of residential  
micro-districts under conditions prevailing in the south. Zhil.  
stroi. no.4:22-25 '62. (MIRA 15:5)  
(City planning)

SHARINSKIY, T.L., inzh.; NECHESOV, B.A., inzh.

Houses of keramizit-concrete panels. Transp.stroi. 11 no.4:28-30  
Ap '61. (MIRA 14:5)  
(Lightweight concrete) (Railroads--Buildings and structures)

AYKHODZHAYEV, B.I.; INOYATOV, N.; SHARIPDZHANOV, A.

Physicochemical properties of crosslinked polyvinyl alcohol.  
Uzb.khim.zhur. 7 no.1:40-43 '63. (MIRA 16:4)

1. Institut khimii polimerov AN UzSSR.  
(Vinyl alcohol polymers)

S/167/60/000/004/001/003  
A006/A001

AUTHORS:

Sharipkulov, R. S., Bannykh, O. A., Goncharov, I. Ye., Zudin, I. F.,  
Linchevskiy, B. V., Prokoshkin, D. A.

TITLE:

The Effect of Chromium and Manganese on Phase Transformations of  
Chrome-Manganese Steels

PERIODICAL:

Izvestiya Akademii Nauk UzSSR, Seriya tekhnicheskikh nauk, 1960,  
No. 4, pp. 62-69

TEXT: In developing chrome-manganese stainless steels by replacing the nickel by manganese, investigations into structural phases had been carried out previously by A. V. Shultin, F. F. Khimushin, F. M. Becket (Ref. 1, 2, 7); G. V. Estulin (Ref. 3); A. T. Grigor'yev, D. L. Kudryavtsev (Ref. 4, 6) and foreign scientists (Ref. 8-10). In the present article information is given on the effect of manganese and chromium on phase transformations in steel. In a 12-kg induction furnace, 16 alloys with different chromium and manganese content and one chrome-nickel alloy containing Ti were melted. Changes in hardness after water quenching at 800, 900, 1,000, 1,100 and 1,200°C were studied. The dependence of the hardness on temperature is shown in Table 3. After quenching

Card 1/4

S/167/60/000/004/001/003  
AOC6/A001

The Effect of Chromium and Manganese on Phase Transformations of Chrome-Manganese Steels

the specimens were subjected to an analysis of the microstructure. The steels were tempered at 650, 700, 750 and 800°C. Changes in  $H_{B0}^{BR}$ , depending on the tempering time of steels with 17% Cr, quenched at 1,100°C are given in Table 4. The connection of a possible  $\delta$ -phase formation and higher hardness was determined by investigating the magnetic properties of the steel. Specimens of all steel melts were analyzed on an M. S. Akulov type anisometer at 20°C, after tempering at 750°C for 10 hours. The amount of a ferrimagnetic phase was determined for various steel grades. Dilatometrical analysis was made on chrome-manganese specimens quenched at 1,100°C with subsequent annealing at 750°C for 10 hours. Curves of temperature versus linear expansion for three grades of steel with 10% Cr were plotted (Fig. 2). A phase analysis was made of precipitates out of an electrolyte on saturated potassium chloride base with addition of 5 to 50 mg/l hydrochloric acid and 5 to 25 g/l citric acid at a current density of 0.6 - 1.0 amp/cm<sup>2</sup> and a temperature not over 20°C. A copper cylinder was used as a cathode. 9 to 12 mm specimens were placed into a collodion bag filled with 100 - 130 ml of the filtrated electrolyte. The precipitates were

Card 2/4

S/167/60/000/004/001/003  
A006/A001

The Effect of Chromium and Manganese on Phase Transformations of Chrome-Manganese Steels

separated from the electrolyte, washed and dried at 100°C in hydrogen atmosphere for 20 to 30 minutes. Roentgenograms were taken of the dreid precipitates with a РКД (RKD) camera on Cr radiation without using a filter. Exposure time was 13 to 18 hours. A chemical analysis was made of precipitates separated out of 4 steel grades in an electrolyte composed of 250 g/l potassium chloride, 5 mg/l hydrochloric acid, 5 g/l citric acid, 0.6 - 0.8 amp/cm<sup>2</sup> current density and 18 - 22°C inside the collodion bag. The investigations performed yielded the following results: At a content of 11% Mn, independent of the chromium content, the steel contains in its structure austenite as well as ferrite. It is not possible to convert the steel into the austenitic state by heat treatment. Steel with 16 - 22% Mn and 8 - 10% Cr has a  $\gamma$  +  $\epsilon$ -structure at temperatures below 140 - 210°C and an austenitic structure at a temperature over 210°C. The presence of the  $\epsilon$ -phase was not observed in steel with 27% Mn. In steels with 13 and 17% Cr, independent of the manganese content, the structure is composed of ferrite and austenite after quench-hardening at a temperature over 900°C. The amount of ferrite in the steel group with 17% Cr is considerably higher than

Card 3/4

3/167/60/000/004/001/003  
A006/A001

The Effect of Chromium and Manganese on Phase Transformations of Chrome-Manganese Steels

that of steels with 13% Cr. After heating to 600 - 900°C, the ferrite is decomposed and the  $\delta$ -phase is formed (except X13Г11 (Kh13G11)<sup>14</sup> and X17Г11 (Kh17G11)<sup>15</sup> steels). Steels with 17 and 13% Cr contain carbide of the  $M_23C_6$  type which may be expressed by the formula  $(Fe, Mn, Cr)_{23}C_6$ . There are 5 tables, 2 figures and 11 references, 6 Soviet, 2 English and 3 German.

ASSOCIATION: Institut metallurgii AN SSSR (Institute of Metallurgy AS USSR)  
Gornyy otdel AN UzSSR (Mining Department of AS UzbekSSR)

SUBMITTED: December 23, 1959

Card 4/4

SHARIKULOV, R. S., Cand. Tech. Sci. (diss) "Investigation of Chrome-manganese Stainless Steel, Alloyed with Nitrogen, Copper and Other Elements," Moscow, 1961, 18 pp. (Moscow Bauman Higher Tech. School) 120 copies (KL Supp 10-61, 277).

PHASE I BOOK EXPLOITATION

SOV/5947

Prokoshkin, Dmitriy Antonovich, Ivan Feofanovich Zudin, Rustan  
Salikhovich Sharipkulov, and Oleg Aleksandrovich Bannykh

Legirovaniye khromomargantsovistoy nerzhaveyushchey stali (Alloy-  
ing Chromium-Manganese Stainless Steel) Moscow, Izd-vo AN SSSR,  
1961. 74 p. Errata slip inserted. 3000 copies printed.

Sponsoring Agency: Akademiya nauk SSSR. Institut metallurgii im.  
A.A. Baykova.

Resp. Ed.: N.N. Kurnakov, Professor, Doctor of Chemical Sciences;  
Ed. of Publishing House: A.N. Chernov; Tech. Ed.: V.Ye. Volkova.

PURPOSE: This book is intended for metallurgists and mechanical  
engineers.

COVERAGE: Problems connected with the effect of different alloying  
elements on the phase composition, transformation, and mechanical

Card 1/4

## Alloying Chromium-Manganese (Cont.)

SOV/5947

and corrosion properties of chromium-manganese stainless steels are discussed, with particular attention given to the alloying of steel containing 17 to 18% Cr and 12 to 15% Mn. The present work is based on results of investigations carried out at the Institute of Metallurgy, Academy of Sciences USSR, and on experimental data published in Soviet and non-Soviet literature. No personalities are mentioned. There are 53 references: 18 Soviet, 18 English, 16 German, and 1 Czech.

## TABLE OF CONTENTS:

Foreword	3
I. Chromium-Manganese Stainless Steels	5
The Fe--Cr--Mn System	5
Effect of chromium and manganese on the structure and properties of steel	9

Card 2/4

S/167/61/000/002/003/003  
D224/D301

AUTHORS:

Sharipkulov, R.S. and Prokoshkin, V.A.

TITLE:

Mechanical and certain physico-chemical properties of  
chromium-manganese steel

PERIODICAL: Akademiya nauk UzSSR. Seriya tekhnicheskikh nauk.  
Izvestiya nauk, no. 2, 1961, 85 - 91

TEXT: The steels investigated contained less than 0.1 % C, 16 com-  
positions of chrome-manganese steel free from other alloy elements  
were melted alongside the chromium-nickel steel X18H9T (Kh18N9T).  
The metal was forged into billets, 12 mm diameter, 14 x 14 mm<sup>2</sup>,  
20 x 20 mm<sup>2</sup>, and it was also rolled into strip 45 x 5 mm<sup>2</sup>. Short-  
term tests to fracture were carried out at temperatures of 20 and  
600° on KRD-3-type specimens after soaking for one hour at 1100°  
and quenching in water, followed by tempering at 750° for 10 hours.  
The influence of temperature and time of soaking during tempering  
of quenched specimens on the formation of the δ-phase (intermetal-

Card 1/3

S/167/61/000/002/003/003  
D224/D301

Mechanical and certain physico- ...

lic compound FeCr) was studied on steel X17 16 (Kh17G16) (16.74 % Cr, 16.3 % Mn, 0.14 % Ni, 0.29 % Si, 0.07 % C). The steels were also subjected to corrosion testing. Such tests were carried out in boiling 55 % nitric acid. The specimens, 30 x 20 x 2.5 mm<sup>3</sup>, were first quenched from 1100° in water. 7 steels were tested for 4 cycles of 30 hours each, the remainder for 4 cycles of 25 hours each. It was found that a chromium-manganese steel having an austenitic structure approaches in its mechanical properties the steel Kh18N9T both at room temperature and at 600°, and in some cases is even superior. A steel containing up to 13 % Cr and up to 11 % Mn exhibits a superior U.T.S. owing to its austenite-martensite-type structure. Steels having an austenitic-ferritic structure have mechanical properties practically equivalent to those of steel Kh18N9T at 20° after quenching. Heating to 500-850° causes formation of the δ-phase which results in a drastic decrease in mechanical properties of these steels. Chromium-manganese steels containing 13 and 17 % Cr and 10 and 15 % Mn, respectively, are closest with respect to their resistance to nitric acid attack to steel Kh18N9T. There

Card 2/3

Investigating the effect of ...

S/659/61/007/000/043/044  
D231/D303

specimens were quenched from 1100°C then tempered at 650 and 750°C. The duration of tempering varied from 30 min. to 100 hrs. Investigated were: 1) Hardness of the steel in the quenched state and after tempering for different times. 2) Changes in the microstructure. 3) For several steel specimens only the predominating phases were electrolytically deposited and subjected to X-ray analysis. In order to have a better idea of the effect of the concentration of a particular alloying element on the stability of the ferrite during the tempering of quenched steels, relative (not absolute) changes of hardness were compared. For that purpose tempering at 750°C was carried out for a period from 0 to 50 hours and the change in hardness at 50 hours was taken as 100 %. The results obtained for the above-mentioned alloying elements were tabulated. Under these conditions of tempering Ti and Nb slowed down considerably the change in hardness of the steels. In case of Nb the retardation increased with its concentration whereas in the case of Ti 0.42 % slowed down and 0.69 % somewhat increased the change in hardness. Consequently, at a given concentration of Ti in the steel the rate of decomposition of ferrite reaches a minimum at a given temperature and at a

Card 2/4

Investigating the effect of ...

S/659/61/007/000/043/044  
D231/D303

high Ti content its decomposition increases. A similar effect was observed in steels alloyed with Mo. It was interesting to observe that in alloys tempered at 650°C the rate of decomposition of the ferrite decreased. This phenomenon was investigated by X-ray analysis of the electrolytic deposits obtained from steels containing Mo and Ti after tempering at 750°C for 50 hours. It was found that the deposits obtained from steels alloyed with Ti contained particles of TiC,  $Me_{23}C_6$  and the Laves's phase of the type  $Me^1Me^{11}$ . Carbides  $Me_{23}C_6$  were found together with carbides TiC in steel containing 0.21 % Ti when the amount of the latter was insufficient to combine with all the C present in the steel. No carbides  $Me_{23}C_6$  were found in steels containing 0.42 and 0.69 % of Ti as all the C was combined with Ti. The effectiveness in slowing down the rate of decomposition of the  $\alpha$ -solid solution of the alloying elements used was in the order Nb > Ti > Mo > Ni. The latter was almost without effect. The authors concluded: 1) The ferrite-forming elements, i.e. Ti, Nb, Mo stabilize the ferrite as well because they slow down the rate of formation of the  $\sigma$ -phase. 2) At a sufficiently high concen-

Card 3/4

S/659/67/  
D231/D303

Investigating the effect of ...  
 trations of an alloying element with the  $\sigma$ -phase. If the rate of separation of this phase is higher than that of the  $\sigma$ -phase, then the rate of decomposition of the ferrite measured by variation in hardness can increase with the amount of the alloying elements, Ni, and Cu, by decreasing the amount of the ferrite-forming elements, practically no effect on its decomposition. There are 4 figures, 1 table and 5 references: 4 Soviet-bloc and 1 non-Soviet-bloc. The reference to the English-language publication reads as follows: H. T. Shirley, J. Iron a. steel. Inst., 174, 1953.

AU

TIT

PERIOD

Card 4/4

Manganous steel austenite during cold

TEXT: *Voprosy zhurnal, Metallurgiya, no. 12, 1962, 27, abstract*  
*(In collection: "Vopr. energ. gidrotekhn. i gorn. del.", Tashkent, AN UzSSR, 1961, 231 - 237)*

The authors studied the effect of alloying elements upon the quantity of the manganous phase and the stability of the austenite after tensile deformation in two series of stainless Cr-Mn steels specified as X 18G15 (Kh18G15) (6 heats) and X17Г12 (Kh17G12) (8 heats). KhVG15 steel contains in %: C 0.05 - 0.07, Cr 17.66 - 18.90, Mn 14.52 - 15.52, Ni 0.89 - 3.65, N 0.13 - 0.31, Si 0.25 - 0.39, S 0.007 - 0.01, P 0.015 - 0.18. Kh17G12 steel contains in %: C 0.04 - 0.08, Cr 17.03 - 17.59, Mn 10.73 - 12.22, N 0.10 - 0.22, Cu 0.35 - 0.97, Si 0.19 - 0.44, S 0.006 - 0.01, P 0.003 - 0.014. All the specimens were heated to 1,000°C during 1 hour and water-cooled. The effect of N, Cu and Ni

APPROVED FOR RELEASE: 08/23/2000

CIA-RDP86-00513R001548610020-4

Card 1/2

L 15572-63

ACCESSION NR: AP3002708

superior to those of the steel IKh18N9T. Hardened and tempered steels that contain nitrogen are harder than the IKh18N9T. The tempering of these steels decreases their toughness considerably; this is caused by the separation of carbides or carbonitrides around the grain boundaries. The Cr-Mn austenitic steels containing nitrogen can serve as substitutes for the stainless IKh18N9T steel. Orig. art. has: 5 tables and 4 figures.

ASSOCIATION: Gornyay otdel AN UzSSR (Department of Mining, Academy of Sciences, Uzbek SSR)

SUBMITTED: 200ct62

DATE ACQ: 12Jul63

ENCL: 00

SUB CODE: ML

NO REF SOV: 007

OTHER: 003

Card 2/2

SHARIPOV, A.

Need for photographic equipment and supplies. Sov.foto 20  
no.1:17 Ja '60.  
(MIRA 13:5)

1. Minister prosveshcheniya Kazakhskoy SSR.  
(Photography--Study and teaching)

GOLOVANENKO, B.I.; SHARIFOV, A.M.; IOPPO, I.I.; MAMETABULINA, F.G.

Obtaining phthalic anhydride by conjugated vapor-phase oxidation  
of hydrocarbons on vanadium catalysts. Neftekhimia 4 no.4: 541-592  
Zn-Ag '64. (MIRA 17:10)

I. Nauchno-issledovatel'skiy institut neftekhimicheskikh proizvodstv,  
Ufa.

SHARIPOV, A.Kh.; GOLOVANENKO, B.I.; IOFFE, I.I.; BORSHCHENKO, V.P.;  
FATKULLINA, N.S.

Obtaining phthalic anhydride by oxidizing a petroleum naphthaline  
fraction. Nefteper. i neftekhim. no.8:22-23 '64. (MIRA 17:10)

1. Vsesoyuznyy nauchno-issledovatel'skiy institut neftekhimicheskikh  
protsessov, Leningrad, i Nauchno-issledovatel'skiy institut nefte-  
khimicheskikh proizvodstv, Ufa.

L 51379-65 EWT(m)/EPF(c)/EWP(j) FC-4/Pr-4 RM

UR/0318/64/000/010/0041/0044

ACCESSION NR: AP5015466

19

AUTHOR: Sharipov, A.Kh.; Shirmukhametov, O.A.; Isyanov, I.Ya.

18

TITLE: Economic method of derivatives of phthalic anhydride from neutral petroleum distillates

B

SOURCE: Neftepererabotka i neftekhimiya, no. 10, 1964, 41-44

TOPIC TAGS: petroleum refining, naphthalene

Abstract: Results of investigations conducted to determine an economic method of preparation of phthalic anhydride are reported. Petroleum fractions were subjected to hydrodealkylation, to give a reaction mass containing naphthalene, the main source of phthalic anhydride. Other light hydrocarbons were also obtained. Pure naphthalene isolated by distillation or crystallization is expensive and is accompanied by a considerable loss of the final product. It has been found that it is considerably more economical to isolate from the reaction mixture a broad fraction containing about 95 percent naphthalene, and that the method of obtaining phthalic anhydride from naphthalene in this fraction is less expensive than that used to obtain the anhydride from

Card 1/2

L 51XG-55

ACCESSION NR: AP5015466

pure naphthalene. It was further established that the cost of the preparation of phthalic anhydride increases if the fraction used contains less than 95 percent of naphthalene.

Orig. art. has 1 figure and 3 tables.

ASSOCIATION: Ufimskiy nauchno-issledovatel'skiy institut neftekhimicheskikh proizvodstv (Ufa Scientific-Research Institute of Petrol-Chemical Products)

SUBMITTED: 00

ENCL: 00

SUB CODE: FP

NO REF. SOV: 015

OTHER: 003

JPRS

Card

*b3*  
2/2

CHARACTERISTICS:

... a dynamograph for determining the efficiency of a pump.  
Neuch. tekhn. sber. po dob. nefti no.27:98-1CC '65. (MIRA 18:9)

1. Vsesoyuznyy neftegazovyy nauchno-issledovatel'skiy institut.

L 19372-66 - EWT(m)/EWP(j) RM  
ACCESSION NR: AP5015461

UR/0318/64/000/008/0022/0023

AUTHOR: Sharipov, A. Kh.; Golovanenko, B. I.; Toffe, I. I.; Borshchenko, V. P.;  
Fatkullina, N. S.

TITLE: Preparation of phthalic anhydride by oxidation of the naphthalene /fraction  
of crude oils

SOURCE: Neftepererabotka i neftekhimiya, no. 8, 1964, 22-23

TOPIC TAGS: crude petroleum, naphthalene, oxidation

Abstract: Noting that in the USA the amount of crude-oil naphthalene is almost as large as that produced from coke, the authors describe their studies of the vapor-phase catalytic oxidation of the crude-oil naphthalene fraction yielding phthalic anhydride. They show that, relative to the naphthalene content, the phthalic-anhydride yield may reach 94% of the theoretical. However, this is achieved at the cost of a catalyst-productivity decrease of 15-20%. Orig. art. has 2 tables.

ASSOCIATION: VNIIneftekhim, Leningrad; NIIneftekhim, Ufa

SUBMITTED: 00

ENCL: 00

SUB CODE: FD, GC

NO REF Sov: 002

OTHER: 002

JPRS

Cord 1/1 AG

LIMAR', T.P.; UVAROV, K.A., BULACHEVA, A.F., SIVYUBIN, A.S.; BEDNOVA, I.N.; MAKOVSKAYA, I.B., SOLOMEINA, G.I., DOLMATOV, Yu.P.; BOBYRENKO, Yu. Ya., KOGAN, P.I.; KOVALENKO, P.N., IVANOVA, N.I., FOKIN, A.V.; KOMAROV, V.A.; SOROCHKIN, I.N., FAUTICHA, S.M.; RAVDEL', A.A.; GORELIK, G.N.; DAUKSNAS, V.K. (Dauksas, V.); PIKUNAYTE, L.A. (Pikunaitė, L.); SHARIPOV, A.Rh.; SHABALIN, I.I.; STEPNOVA, G.M.; SHMIDT, Ye.V.; DUHOV, S.S., STRUKOV, O.O.

Scientific research papers of the members of the All-Union Mendeleev Chemical Society (brief information). Zhur. VKhK 19 no.3; 350-pm '65. (MIRA 18:8)

1. Donetskiy filial Vsesoyuznogo nauchno-issledovatel'skogo instituta khimicheskikh reaktivov i osoboi chistykh khimicheskikh veshchestv (for Limar', Uravova, Bulacheva). 2. Ural'skiy nauchno-issledovatel'skiy khimicheskiy institut (for Shubin, Bednova, Makovskaya, Solomeina). 3. Chelyabinskij filial Gosudarstvennogo nauchno-issledovatel'skogo i proyektного instituta mineral'nykh pigmentov (Dolmatov, Bobyrenko). 4. Postovskiy-na-Donu universitet (for Kogan, Kovalenko, Ivanova). 5. Leningradskiy tekhnologicheskiy institut imeni Lensoveta i Institut mineral'nykh pigmentov (for Ravdel', Gorelik). 6. Vil'nyusskiy gosudarstvennyy universitet imeni Kpsukasa (for Dauksnas, Pikunayte). Nauchno-issledovatel'skiy institut neftekhimicheskikh proizvodstv (for Sharipov, Shabalin). 7. Tomskiy politekhnicheskiy institut imeni Kirova (for Stepnova, Schmidt).

LEONT'YEVA, YU.A., dotsent; GERASIMOV, B.S., dotsent; TRUSHKINA, L.R., aspirant; SOBOLEVA, Ye.M., kand. sel'skokhoz. nauk; SHARIFOV, B.S., nauchnyy sotrudnik (Tashkent); SAF'YANOV, S.P., aspirant; KRALL, E.L., kand. biolog. nauk; YULDASHEVA, Kh.Yu., mladshiy nauchnyy sotrudnik; KUZNETSOVA, P.A., agronom (Kostroma); ZHALNINA, L.S., mladshiy nauchnyy sotrudnik; SENCHENKO, M.G., mladshiy nauchnyy sotrudnik; SINITSYNA, A.A., nauchnyy sotrudnik; GOLUBEKIN, V.G., starshiy nauchnyy sotrudnik; BOGOVIK, I.V., kand. biolog. nauk (L'vov).

Brief news. Zashch. rast. et vred. i bol. 9 no.10252-56 '64  
(MIRA 18:1)

1. Kafedra zashchity rasteniy Kuybyshevskogo sel'skokhoz naistven-nogo instituta (for Leont'yeva, Gerasimov).
2. Samarkandskiy universitet (for Trushkina).
3. Kazakhskiy institut zashchity rasteniy (for Saf'yanov).
4. Institut zoologii i botaniki AN Estoneskoy SSR, Tartu (for Krall').
5. Sredneaziatskiy institut zashchity rasteniy (for Yuldasheva).
6. Institut lubyanykh kul'tur (for Zhalnina, Senchenko).
7. Institut sadovodstva ne-chernozemnoy polosy (for Sinitsyna).
8. Novosibirskaya sel'skokhozyaystvennaya opytnaya stantsiya (for Golubkin).

FEDOSOV, N.M.; SHARIPOV, E.I.; KUNAKOV, Ya.N.; OREKHOVA, R.S.

Mechanical properties of iron-silicon alloys. Izv. vys. ucheb. zav.;  
chern. met. 6 no.11:182-185 '63. (MIRA 17:3)

1. Moskovskiy institut stali i splavov.

FEDOSOV, N.M.; SHARIPOV, E.I.; KUNAKOV, Ya.N.; LYUKEVICH, V.I.

Choosing the optimum temperature for the hot rolling of  
transformer steels. Vest. AN Kazakh. SSR 20 no.1:64-67  
Ja '64. (MIRA 17:3)

ACCESSION NR: AP4045064

S/0031/64/000/008/0082/0087

AUTHORS: Fedosov, N. M.; Sharipov, E. I.; Kunakov, Ya. N.

TITLE: Optimal temperature for hot rolling of high-silicon steels

SOURCE: AN KazSSR. Vestnik, no. 8, 1964, 82-87

TOPIC TAGS: high silicon steel, hot rolling, resistance furnace, plastic deformation, yield limit/ 800 rolling mill, 150 rolling mill, P4 testing machine

ABSTRACT: To determine the temperature for hot-rolling of high-silicon steels that would result in good ductility, minimal resistance to plastic deformation, and favorable grain orientation, the authors studied the relation between the properties of various steels, their silicon content, and the rolling temperature. Steels with silicon content of 3.3-6.4% were melted in both vacuum and open electric furnaces. Each ingot (cross section 90 x 90 mm, weight 24 kg) was hot-rolled in a standard industrial mill 800 to obtain strips 2.8 mm thick (from which specimens 25 mm wide and 100 mm long were obtained). These were rolled in a laboratory machine of the type 150 at a rate of 0.24 m/sec. The test specimens (3 mm in diameter and 20 mm in working length) were heated in a tubular resistance furnace and then tested until fracture in a machine of the type P-4, using a load of 4000 kg. The experiments were conducted in a temperature range of 20-600C at intervals of 100C, with 3-5

Ca. 1/2

ACCESSION NR: AP4045064

specimens tested at each temperature. It was found that the ductility of the specimen decreased with the silicon content (when the content was higher than 5% the relative elongation and the transverse contraction were close to zero). The yield limit decreased gradually with increasing temperature up to 500C and more abruptly thereafter. On the basis of data obtained in this work, the following optimal temperatures are recommended: for a silicon content of 3.5 to 4% --100 to 200C, for 4.5 to 5% --250 to 300C, and for 5.5 to 6.5% --400 to 500C. Orig. art. has: 5 figures and 1 table.

ASSOCIATION: none

SUBMITTED: 00

ENCL: 00

SUB CODE: MM

NO REF SOV: 005

OTHER: 005

Card 2/2

PHIGS Y, V. A.; CHURCH, E. L.; KUZNETOV, YAS.

Optimum temperature of hot rolling of high-silicon steels.  
Vest. AN Kazakh. SSR av no.8; 82-87 Ag '64.  
(MIRA 17:11)

SHARIKOV, V. G.

Locomotives - Repairs

Moving a locomotive with a windlass during repairs. Torf. prom. 29, No. 3, 1952.

Monthly List of Russian Accessions, Library of Congress  
April 1952. UNCLASSIFIED.

ACC NR: AP7002922

SOURCE CODE: UR/0167/66/000/005/0003/0009

AUTHOR: Kakhimov, G. R.; Sharipov, Kh.; Latipov, K. Sh.

ORG: Tashkent Polytechnic Institute (Tashkentskiy politekhnicheskiy institut)

TITLE: Resonance curves of two-circuit ferroresonance circuits

SOURCE: AN UzSSR. Izvestiya. Seriya tekhnicheskikh nauk, no. 5, 1966, 3-9

TOPIC TAGS: resonance curve, ferroresonance circuit, circuit design, volt ampere characteristic

ABSTRACT: A mathematical model for a two-circuit ferromagnetic circuit was derived, permitting an evaluation of the characteristics of an analog transmission line with axial-transverse compensation. The loop shaped volt-ampere characteristics and frequency characteristics or resonance curves were analyzed, approximating the magnetization of the coil with a ferromagnetic core. Two-circuit circuits, having loop-shaped volt-ampere characteristics, also have loop-shaped frequency characteristics. The region of multivalent frequency characteristics corresponds to the region of the change of the fundamental frequency of the circuit at a given value of applied voltage. The lowest frequency of possible autooscillation in the circuit may be higher or equal to the minimum fundamental frequency of the circuit. Orig. art. has: 24 formulas and 3 figures.

SUB CODE: J9/ SUBM DATE: 05Apr66/ ORIG REF: 007

Card 1/1

L 17428-66 EWT(1 ) IJP(c) GG  
ACCESSION NR: AR5018679

SOURCE CODE: UR/0196/65/000/007/A010/A011

AUTHOR: Rakhimov, G.R.; Sharipov, Kh.

ORG: none

TITLE: Autoparametric oscillations in two-contour electroferromagnetic circuits

SOURCE: Ref. zh. Elektrotehnika i energetika, Abs. 7A85

REF SOURCE: Sb. dokl. Tashkentsk. politekhn. in-t., no. 6, 1964, 155-171

TOPIC TAGS: ferroelectricity, electromagnetism, magnetic circuit, non linear system

21,44155

TRANSLATION: The results are given of an experimental study of four possible types of two-contour electroferromagnetic circuits with a nonlinear inductive capacity and with either 2 additional condensators, or with a coil and a condensator with loop-type volt-amper characteristics. A study was made of the effect of the voltage-supply volume, the damping of the circuit, and its charge and capacity on generating and keeping lower harmonic oscillations with frequencies equal to one

UDC: 621.372.061

Card 1/2

L 17428-66

ACCESSION NR: AR5018679

third of the voltage-supply frequency. Though these oscillations are generated and exist at certain definite voltage-supply volumes, beyond which there occurs a stopping, their amplitudes remains almost permanent during voltage-supply variations. Damping and charge bear on the size of the oscillations area, but they hardly affect their amplitude. The lowest harmonic oscillations are generated at a higher-than-critical capacity, and their amplitudes increase with increasing capacities. They are superposed on the oscillations with voltage-supply frequencies whose amplitudes are proportional to the applied voltage. References 5. See also RZhE, 1965, 6A29. B. Zhukhovitskiy.

SUB CODE: 09

Card 2/2 net

SHARIPOV, M.

SHARIPOV, M.

Improving the design of the clutch on the ZIS-5. Avt.transp. 32  
no.6:36 Je '54.  
(Automobiles--Clutches)

SHARIPOV, M. K.

"The Ability of the Causative Agent of Bacterial Dysentery To Survive on Vegetables and Fruit." Cand Med Sci, Tashkent Medical Inst, Tashkent, 1953.  
(RZhBio., No 7, Apr 55)

SG: Sum. No. 704, 2 Nov 55 - Survey of Scientific and Technical Dissertations  
Defended at USSR Higher Educational Institutions (16).

SHARIPOV, M.R.; MYASNIKOVA, D.Ye.; MURZOVA, V.P.

Incidence of scarlet fever in Tashkent (1947-1957). Sbor. nauch. trud.  
(MIRA 18-10)  
TashGMI 22:355-359 '62.

I. Kafedra epidemiologii (zav. kafedroy - prof. M.V. Seleshnikova)  
Tashkentskogo gosudarstvennogo meditsinskogo instituta.

SHARIPOV, M.K.

Survival of dysentery bacteria in water. Izv.AN Uz.SSR.Ser.  
med. no.4:89-94 '58. (MIRA 12:5)

1. Tashkentskiy gosudarstvennyy meditsinskiy institut.  
(TASHKENT--SHIGELLA) (WATER--BACTERIOLOGY)

SHARIPOV, M.K.

Survival of dysenteric bacteria on vegetables and fruits  
in an experiment. Med. zhur. Uzb. no.4·27-30 Ap '60.  
(MIRA 15:3)  
1. Iz kafedry epidemiologii (zav. - prof. M.N. Soshnikova)  
Tashkentskogo gosudarstvennogo meditsinskogo instituta.  
(SHIGELLA DYSENTERIAE)  
(FOOD--BACTERIOLOGY)

BATTALOVA, Sh.; LIKEROVA, A.A.; SHARIPOV, M.Sh.

Catalytic and bleaching properties of benzenite clays of the  
Chardara deposits. Izv. AN Kazakh. SSR, Ser. tekhnicheskikh nauk  
no. 1-2, 1963.  
(MLRA 17:3)

45133

S/166/62/000/006/008/016  
B104/B186

26.16.40

AUTHORS:

Sharipov, N., Ayukhanov, A. Kh.

TITLE:

The correlation between thermionic emission and secondary electron emission from some types of oxide-coated cathodes on activation

PERIODICAL: Akademiya nauk Uzbekskoy SSR. Izvestiya. Seriya fiziko-matematicheskikh nauk, no. 6, 1962, 66-70

TEXT: The change in the thermionic emission density  $i$  and the secondary electron emission coefficient  $\sigma$  during activation of the cathodes of 6117 (6N7) and 618 (6N8) tubes and of the carbonate-coated ( $BaCO_3$  50%,  $SrCO_3$  50%,  $BaCO_3$  100%) cathodes in glass envelopesat  $1 \cdot 10^{-7}$  mm Hg were measured by an inertia-free double modulation method.Results: With the double modulation method the thermionic emission and the secondary electron emission could be measured simultaneously and for the same state of the oxide-coated cathode when the voltage  $E_0$  of the primary electrons was in thecathode was 2.7 v, the energy  $E_0$  of the primary electrons was in the

Card 1/2

Ca

"APPROVED FOR RELEASE: 08/23/2000

CIA-RDP86-00513R001548610020-4

SHARIKOV, N.M.

Biometric machine for operating with film  
35 mm. 8x40-41 Ag 16L.      1976 year. India  
(MFR. 17:10)

APPROVED FOR RELEASE: 08/23/2000

CIA-RDP86-00513R001548610020-4"

SHARIPOV, R.K.; SONGINA, O.A.

Electrochemical determination of molybdenum based on the catalytic  
oxidation of iodide by hydrogen peroxide. Zav.lab. 29 no.11:  
1293-1296 '63. (MIRA 16:12)

1. Kazakhskiy gosudarstvennyy universitet im. S.M.Kirova.

SHARIPOV, R.K.; SONGINA, O.A.

Polarographic study of the catalytic waves of hydrogen peroxide  
reduction in the presence of zirconium. Zhur. anal. khim. 19 no.11:  
1322-1325 '64.  
(MIFI A 18;2)

1. Kazakh State University, Alma-Ata.

...and the following:

...analytical waves of the analytical form previously obtained of  
nitrogen in sulfuric acid as one example. Anal. Chem., Kirov,  
20 no. 6:603-607 '65.  
(MLRA 18:7)

...Kirovskiy gosudarstvennyy universitet, Kirov, Russia.

CHEREVATKO, V.P.; SNIKOVY, R.S.

Method and scheme remove CO<sub>2</sub> from inert gas  
in a catalytic reforming unit. Neftepar. i naftexhim. no.5:  
12-15 1974.

(MIRA 17:8)

2. Prakticheskie zadaniya byly zashchitnye.